

	SPECIFICATIONS	UNIT	
	Plant Capacity	m³/h	100
Mixer Specifications	Mixer Specifications	m³	2
	Dry Filling Volume	Liter	3000
	Compacted Concrete	Liter	2000
	Motor Power	kW	2x37
Weighing Bin Capacity	Cement Weighing Capacity	kg	1200
	Water Weighing Capacity	kg	700
	Additive Weighing Capacity	kg	20
Aggregate Bin	Aggregate Compartments	Pieces	4-5-6
	Bin Capacity	m³	20-40
	Aggregate Weighing Capacity	kg	6000
Transfer Belts	Width	mm	1000
	Length	mm	15000
	Motor Power	kW	22
Cement Screw Conveyor	Diameter	Ø	273
	Length	mm	11500
	Motor Power	kW	15
Air Compressor	Pressure	bar	6-8
	Air Tank	Liter	500
	Store House	L/dk	1013
	Motor Power	kW	5,5
Weight		tons	51
Total Power		kW	215
Transport Type	2 Tow Truck		



ASSOS MOBILE 100 M³ DOUBLE CHASSIS CONCRETE BATCHING PLANT



OUR MIXER QUALITY





*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.







*2*37 kW motor is used.





*Mixer SKF brand automatic and manual lubrication is available.



stop button that may occur switches are available. regarding the mixer.



*There is an emergency *3 pieces telemechanical *Hydraulic unit is available.



















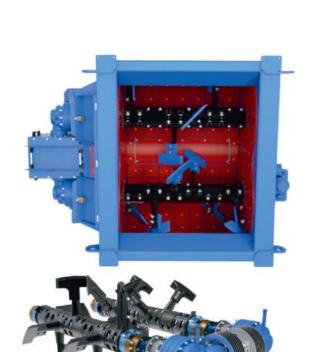

*Mixer bearing part is available.



**Mixer wear-resistant parts are made of Ni-hard material.



*Mixer, mixer and scraper arm group is made of Ni-hard material.



*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY



*Transfer Conveyor with top and bottom covers available.















OUR WEIGHING LAYER QUALITY





*Cement weighing bin is available.



*Water weighing bin is available. *Additive weighing bin is available.





*1" ball valve with actuator is available.



*Vibromotor is available.



*The valves with flap and actuators are available



*The valves with flap and actuators are available

OUR AGGREGATE BIN QUALITY







*Aggregate bin covers are available.



*Aggreagate weighing bin is available



*Vibromotor is available.



*Aggregate pouring chute is available.



*Vibromotor is available.

*Pneumatic controlled piston available.



*KR type reducer is used.



*SNL bearing type is used.



*Rope switch is used.



*Loadcell is available.



















*Aggreagate weighing belt is available

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.

OUR PLANT EQUIPMENT



*0.75 kW single stage *3" valve with butterfly additive pump is available. actuator is available.





*Dalgakiran compressor is available.

CABIN AND AUTOMATION



*Dimension(mm):1900x2300x2400 *PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool



*Siemens/ABB Switching material *Omron/PLC *Laptop *Manual Control (Mimic)


*Air conditioner: Available (9000 btu)






SETTLEMENT PLAN

TRANSPORT PLAN

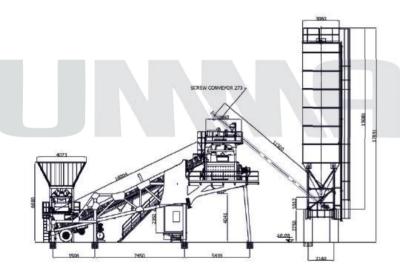

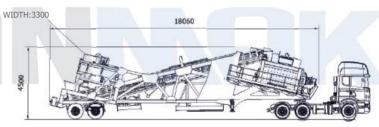

WEIGHT: 27 TONS



WIDTH:2300 WEIGHT: 24 TONS

