

			1
	SPECIFICATIONS	UNIT	
	Plant Capacity	m³/h	100
Mixer Specifications	Mixer Specifications	m³	2
	Dry Filling Volume	Liter	3000
	Compacted Concrete	Liter	2000
	Motor Power	kW	2x37
Weighing Bin Capacity	Cement Weighing Capacity	kg	1200
	Water Weighing Capacity	kg	700
	Additive Weighing Capacity	kg	20
Aggregate Bin	Aggregate Compartments	Pieces	4
	Bin Capacity	m ³	10-15
	Aggregate Weighing Capacity	kg	6000
Transfer Belts	Width	mm	1000
	Length	mm	15000
	Motor Power	kW	22
Cement Screw Conveyor	Diameter	Ø	273
	Length	mm	11500
	Motor Power	kW	15
Air Compressor	Pressure	bar	6-8
	Air Tank	Liter	500
	Store House	L/dk	1013
	Motor Power	kW	5,5
Weight		tons	34,5
Total Power		kW	165



OLYMPUS MOBILE 100 M3 BACTHING **CONCRETE PLANT**



OUR MIXER QUALITY





*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.



*Planetary reducer is used.



*2*37 kW motor is used.





*Mixer SKF brand automatic and manual lubrication is available.



stop button that may occur switches are available. regarding the mixer.



*There is an emergency *3 pieces telemechanical *Hydraulic unit is available.
























*Mixer, mixer and scraper arm group is made of Ni-hard material.



*Mixer bearing part is available.



*Mixer lower pouring chute is available.



*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY







*SNL bearing type is used.

*Rope switch is used.

*Guide roller part is available. **OUR WEIGHING LAYER QUALITY**





*Water weighing bin is available.





*The valves with flap and actuators are available



*Additive weighing bin is available.



*1" ball valve with actuator is available.















OUR AGGREGATE BIN QUALITY



*Aggregate weighing bin is available.



*Vibromotor mevcuttur.





*Pneumatic controlled piston available.

*Aggregate pouring chute is available..



*Vibromotor is available.*Valve is available,

OUR PLANT EQUIPMENT



*Pneumatic controlled piston available.

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.



*0.75 kW single stage *3" valve with butterfly additive pump is available. actuator is available.





*Valve is available.



*Dalgakiran compressor is available.



*Dimension(mm):1900x2300x2400 *PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool



*Siemens/ABB Switching material *Omron/PLC

*Laptop

*Manual Control (Mimic)

*Air conditioner: Available (9000 btu)






*Fully automatic operating system *Weighing indicator very useful and easy

interface


*Software (Cabiness)

*Preparation and printing of requested

SETTLEMENT PLAN

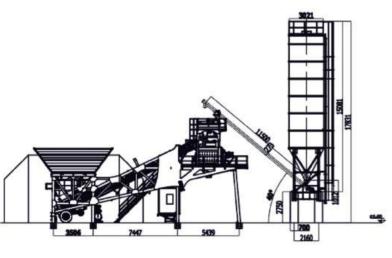

TRANSPORT PLAN



TAŞMA PLANI / TRANSPORT PLAN 3,30X19,71X4,50mt AĞIRLİK/WEĞHT 34,5 TON

