



# UNMANMAK

## SPECIFICATIONS

### Plant Capacity


### UNIT

Mixer Specifications	Plant Capacity	m <sup>3</sup> /h	60
	Mixer Specifications	m <sup>3</sup>	1
	Dry Filling Volume	Liter	1500
	Compacted Concrete	Liter	1000
	Motor Power	kW	2x22
Weighing Bin Capacity	Cement Weighing Capacity	kg	500
	Water Weighing Capacity	kg	250
	Additive Weighing Capacity	kg	20
	Aggregate Compartments	Pieces	4
Aggregate Bin	Bin Capacity	m <sup>3</sup>	10-15
	Aggregate Weighing Capacity	kg	3000
Transfer Belts	Width	mm	800
	Length	mm	11500
	Motor Power	kW	15
Cement Screw Conveyor	Diameter	Ø	219
	Length	mm	11500
	Motor Power	kW	11
Air Compressor	Pressure	bar	6-8
	Air Tank	Liter	500
	Store House	L/dk	1013
	Motor Power	kW	5,5
Weight		tons	22
Total Power		kW	105
Transport Type		2 Container - 1 Tow Truck	




## PATARA

### MOBILE 60 M<sup>3</sup> COMPACT BACTHING CONCRETE PLANT

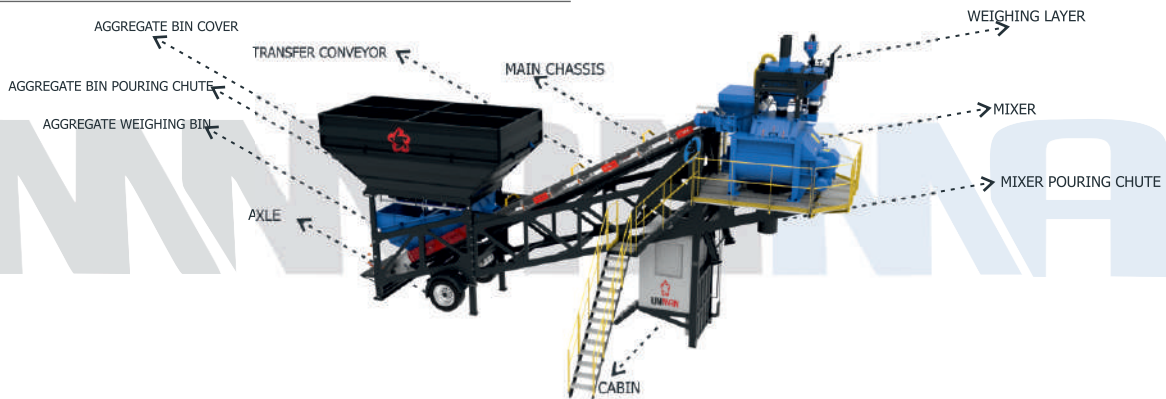

## OUR MIXER QUALITY

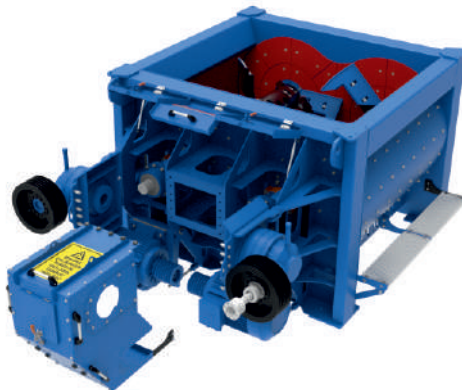


\*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.



\*Planetary reducer is used.



\*2\*22 kW motor is used.

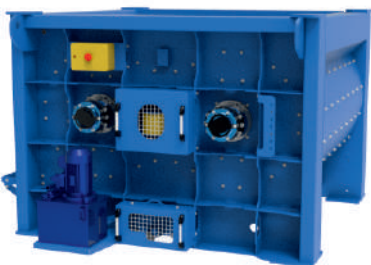

\*Mixer SKF brand automatic and manual lubrication is available.



\*There is an emergency stop button that may occur regarding the mixer.



\*3 pieces telemechanical switches are available.



\*Hydraulic unit is available.



## CONTACT US!



UNMAN A.Ş.  
Adres:İvrek C.5.B 1341.Cad.  
No:71 Yommalı/İ. ANKARA

Phone : +90 312 394 19 90

E-mail: info@unman.com.tr

Web: www.unman.com.tr



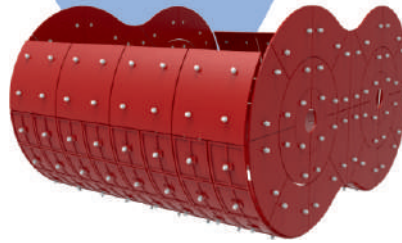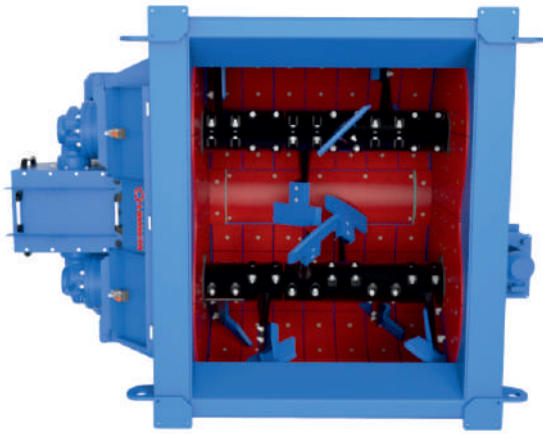

\*\*Mixer wear-resistant parts are made of Ni-hard material.


\*Mixer, mixer and scraper arm group is made of Ni-hard material.



\*Mixer bearing part is available.



\*Mixer lower pouring chute is available.

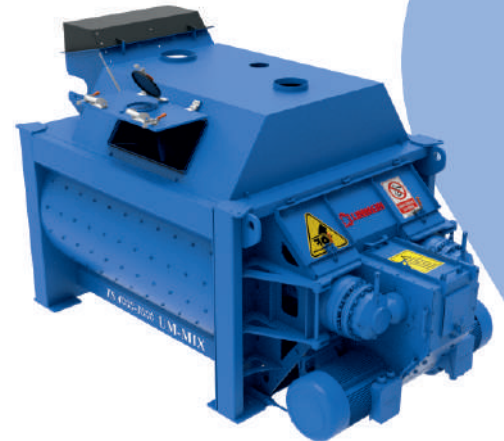

\*Mixer upper cover part is available.

## OUR TRANSFER CONVEYOR QUALITY



\*Loadcell is available.



\*Drum coating is available.



\*KR type reducer is used.



\*Guide roller part is available.



\*SNL bearing type is used.



\*Rope switch is used.



## OUR WEIGHING LAYER QUALITY



\*Cement weighing bin is available.



\*Water weighing bin is available.



\*Additive weighing bin is available.



\*Pneumatic actuator is available. (CP101)  
\*Position indicator is available. (MIC23)



\*Pneumatic actuator is available. (CP101)  
\*Position indicator is available. (MIC23)



\*1" ball valve with actuator is available.



\*Flap is available.



\*Vibromotor is available.



\*Flap is available.



\*Valve is available.

**CONTACT US!**

UMMAN A.Ş.  
Adres: İvrek O.S.B. 1341.Cad.  
No:71 Yomraktepe / ANKARA

Phone : +90 312 394 19 90  
Fax : +90 312 394 19 94

E-mail : info@umman.com.tr  
Web : www.umman.com.tr









