



UNMANMAK

SPECIFICATIONS

Plant Capacity


UNIT

Mixer Specifications	Plant Capacity	m ³ /h	100
	Mixer Specifications	m ³	2
	Dry Filling Volume	Liter	3000
	Compacted Concrete	Liter	2000
	Motor Power	kW	2x37
Weighing Bin Capacity	Cement Weighing Capacity	kg	1200
	Water Weighing Capacity	kg	700
	Additive Weighing Capacity	kg	20
	Aggregate Compartments	Pieces	4
Aggregate Bin	Bin Capacity	m ³	10-15
	Aggregate Weighing Capacity	kg	6000
	Width	mm	1000
Transfer Belts	Length	mm	13500
	Motor Power	kW	22
	Diameter	Ø	273
Cement Screw Conveyor	Length	mm	11500
	Motor Power	kW	15
	Pressure	bar	6-8
Air Compressor	Air Tank	Liter	500
	Store House	L/dk	1013
	Motor Power	kW	5,5
Weight		tons	31
Total Power		kW	165
Transport Type		1 Tow Truck-2 Containers	




ANGORA

MOBILE 100 M³ COMPACT
CONCRETE BATCHING PLANT

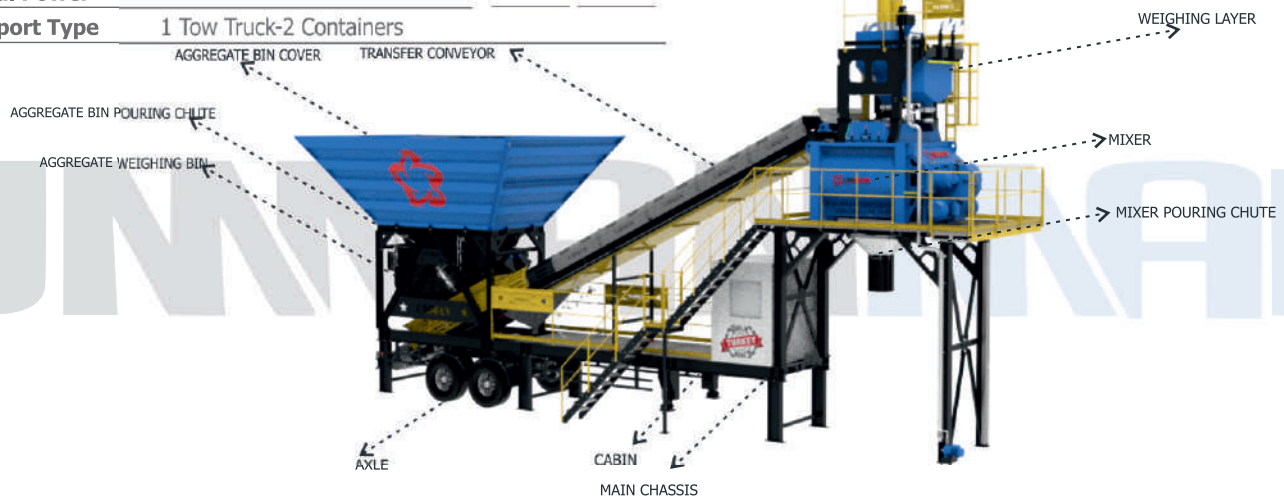

OUR MIXER QUALITY

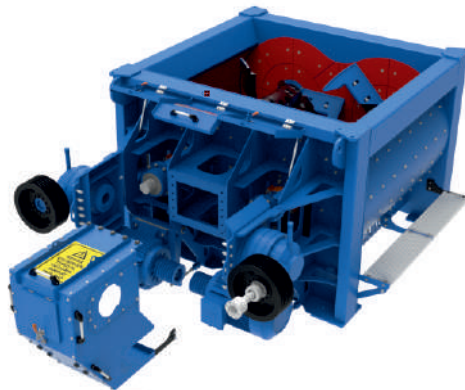

*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.



*Planetary reducer is used.



*2*37 kW motor is used.



*Mixer SKF brand automatic and manual lubrication is available.



*There is an emergency stop button that may occur regarding the mixer.



*3 pieces telemechanical switches are available.



*Hydraulic unit is available.





CONTACT US!

UNMAN A.Ş.
Adres: İvedik C.5.B 1341.Cad.
No:71 Yenimahalle / ANKARA

Phone : +90 312 394 19 90
Fax : +90 312 394 19 94


E-mail: info@unman.com.tr
Web: www.unman.com.tr



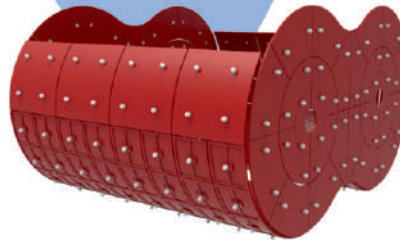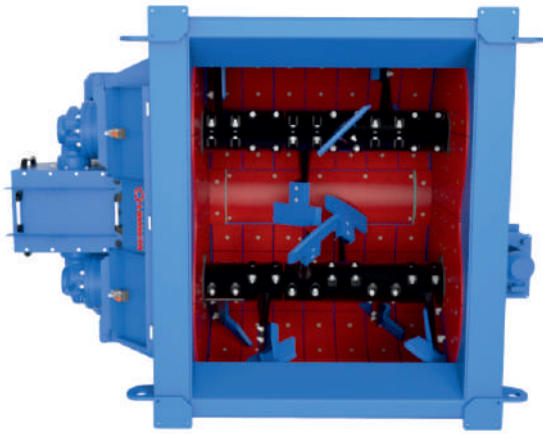

**Mixer wear-resistant parts are made of Ni-hard material.


*Mixer, mixer and scraper arm group is made of Ni-hard material.

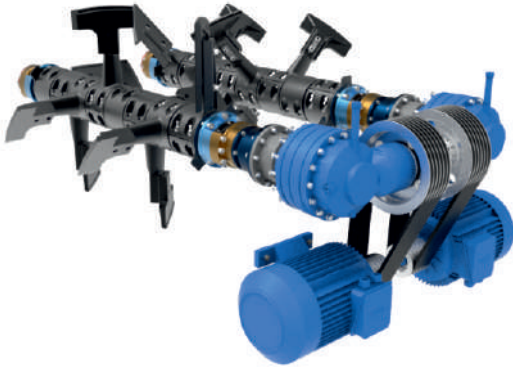

*Mixer bearing part is available.



*Mixer lower pouring chute is available.

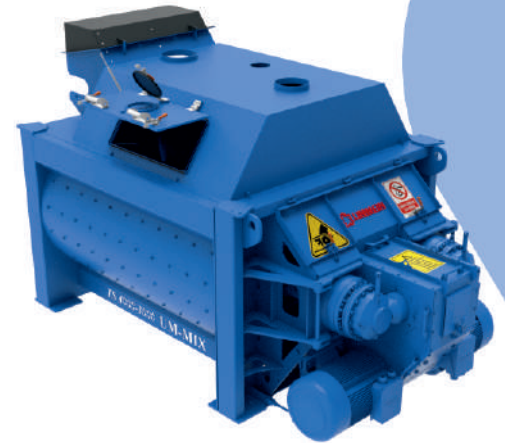

*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY



*Transfer Conveyor with top and bottom covers available.



*Loadcell is available.



*Drum coating is available.



*KR type reducer is used.



*Guide roller part is available.




*SNL bearing type is used.



*Rope switch is used.

OUR WEIGHING LAYER QUALITY

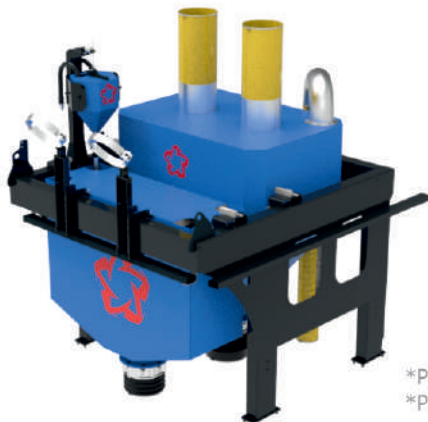

*Cement weighing bin is available.



*Water weighing bin is available.



*Additive weighing bin is available.



*Pneumatic actuator is available. (CP101)
*Position indicator is available. (MIC23)

*Pneumatic actuator is available. (CP101)
*Position indicator is available. (MIC23)

*1" ball valve with actuator is available.



*Flap is available.



*Vibromotor is available.



*Flap is available.



*Valve is available.

CONTACT US!

UMMAN A.Ş.
Adres: İvrek O.S.B. 1341.Cad.
No:71 Yomraktepe / ANKARA

Phone : +90 312 394 19 90
Fax : +90 312 394 19 94


E-mail : info@umman.com.tr
Web : www.umman.com.tr



OUR AGGREGATE BIN QUALITY



*Aggregate bin covers are available..

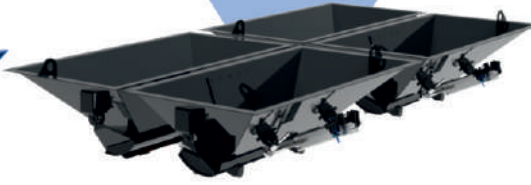

*Aggregate pouring chute is available..



*Aggregate weighing bin is available.



*Pneumatic controlled piston available.



*Vibromotor is available.



*Valve, auto record and silencer are available.



*Loadcell is available.



*Vibromotor mevcuttur.



*Pneumatic controlled piston available.

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.



*0.75 kW single stage additive pump is available.



*3" valve with butterfly actuator is available.



*Valve is available.



*Dalgakiran compressor is available.

OUR PLANT EQUIPMENT

CABIN AND AUTOMATION



*Dimension(mm):1900x2300x2400
*PVC System (Insulating Glass) Insulation,
Walls polystyrene foam, ceiling glass wool



*Siemens/ABB Switching material
*Omron/PLC
*Laptop
*Manual Control (Mimic)
*Air conditioner: Available (9000 btu)



*Fully automatic operating system
*Weighing indicator very useful and easy interface
*Software (Cabiness)
*Preparation and printing of requested reports

ALTERNATIVE TRANSPORTATION PLAN



2 Containers

CONTACT US!

UMMAN A.Ş.
Adres:(velek C.5.B 1341.Cad.
No:71 Yommalı / ANKARA

Phone : +90 312 394 19 90
Fax : +90 312 394 19 94

E-mail : info@umman.com.tr
Web : www.umman.com.tr

